

PERSEUS HIGH PRESSURE

PF61 & PF62 PERSEUS ATEX/ IECEx OR TRI- CERTIFIED WITH AEx (NEC 505) Exd, Exia & INDUSTRIAL PRESSURE SWITCH

The latest innovation to our range of switches features a robust high quality housing with 1 or 2 sealed SPDT microswitches and has been designed for use in environments where explosive gases can be present (e.g. gas fields, oil rigs & chemical plants etc). One of the benefits of the Perseus range is the separation of the flameproof and adjustment chambers allowing adjustment of the set point with power on and the switch in operation.



HIGH PRESSURE

FEATURES

- ✓ Black anodised aluminium switchcase to IP67 standards.
- ✓ Internal adjustment scale.
- ✓ SIL 2 – IEC61508 proven reliability.
- ✓ Single or dual microswitch option.
- ✓ Settings from 4 Bar to 800 Bar.
- ✓ ATEX/IECEx/AEx Flameproof version
CE II2G Exd IIC
T6 Ta = - 50 to +74°C & T5 Ta = - 50 to +89°C. (with or without resistors)
- ✓ ATEX/IECEx/AEx Intrinsically safe
CE II1G Exia IIC
T6 - 50 to +78°C, T5 +93°C, T4 +128°C
(without resistors)
- ✓ ATEX/IECEx/AEx Intrinsically safe
CE II1G Exia IIC
T5 - 50 to +72°C & T4 - 50 to +122°C
(with resistors)
- ✓ Wetted parts NACE MR-01-75 compliant

HIGH PRESSURE RANGES

Piston actuated with sealing ring


ADJUSTMENT RANGE BAR	ADJUSTMENT RANGE PSI	MAX. WORKING PRESSURE BAR	DEADBAND BAR	PISTON CODE	SPRING CODE
4 - 17.5	30 - 230	700	0.5 - 1.5	S6	B
10 - 36	140 - 540	700	1 - 3	S6	W
28 - 108	400 - 1600	700	2 - 8	S3	W
50 - 200	725 - 2825	700	3 - 15	S2	W
115 - 455	1600 - 6600	700	8 - 35	S1	W
200 - 800	2900 - 11600	1000*	15 - 60	S7	W

*1/4" Process connection. Only 700 Bar if 1/2" conn. selected

Wetted parts : 316 stainless steel with either Viton (std), Nitrile, PTFE or EPDM dependant on selection.

PART NUMBER BREAKDOWN			ELECTRICAL CONNECTIONS	
			_ = M20 LEAVE BLANK C = 1/2" NPT ADAPTOR F = M25 ADAPTOR	
SWITCHCASE PF6 = STANDARD PR6 = RESISTOR OPTION	MICROSWITCH OPTIONS 1 = 1 X SPDT 2 = 2 X SPDT 9 = HIGH DEADBAND DUAL SWITCHES ARE MECHANICALLY LINKED TO PROVIDE DPDT	SPRING CODE PLEASE REFER TO RANGE TABLE	BRACKET X = STD - NO BRACKET H = 2" PIPE.R = XPB SPECIAL	
			PISTON CODE PLEASE REFER TO RANGE TABLE	
P F 6 1 A B / B W 3 2 / S 7 X B _				
SWITCHCASE MATERIAL A = BLACK ANODISED ALUMINIUM		SEAL MATERIAL A = NITRILE B = VITON D = PTFE* E = EPDM** <small>* FOR SETTINGS ABOVE 10 BAR. MAX 100 BAR</small> <small>** NOT AVAILABLE WITH S7 PISTON</small> <small>* & ** FEMALE PROCESS CONNECTION ONLY</small>		PROCESS CONNECTION 31 = 1/4" BSP.P FEMALE 32 = 1/4" NPT FEMALE 33 = 1/2" BSP.P FEMALE 34 = 1/2" NPT FEMALE 41 = 1/2" BSP.P MALE 42 = 1/2" NPT MALE <small>*100 BAR MAX PRESSURE ONLY AVAILABLE WITH 1/4" PROCESS CONNECTION.</small>
CERTIFICATION O = ATEX/IECEX Exia INTRINSIC. SAFE B = ATEX/IECEX Exd FLAMEPROOF A = INDUSTRIAL / MARINE C = TRI-CERTIFIED Exd FLAMEPROOF D = TRI-CERTIFIED Exia INTRINSIC. SAFE		ELECTRICAL CONNECTION ENTRY B = RIGHT HAND SIDE		

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED

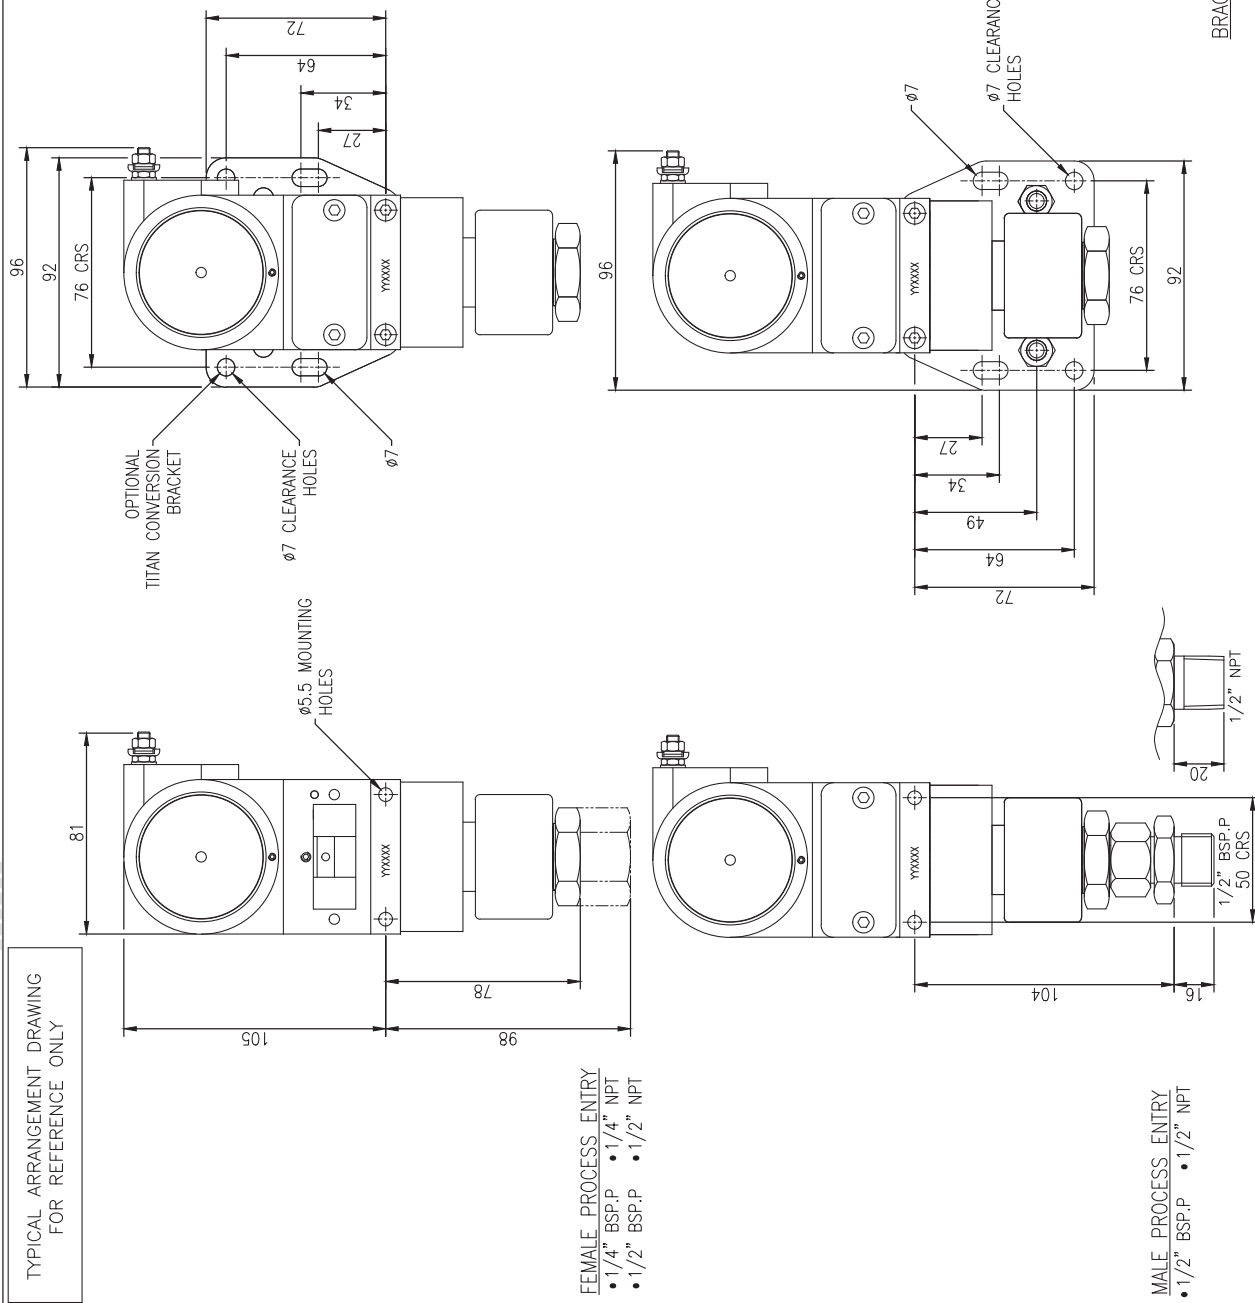

TYPICAL ARRANGEMENT DRAWING FOR REFERENCE ONLY

FEMALE PROCESS ENTRY
 • 1/4" BSP.P • 1/4" NPT
 • 1/2" BSP.P • 1/2" NPT

MALE PROCESS ENTRY
 • 1/2" BSP.P • 1/2" NPT

BRACKET OPTIONS

DRAWING REF: 1558/A1

INDUSTRIAL SWITCHES

INTRODUCTION


The Perseus **pressure, vacuum, differential pressure, temperature, and level** switches are designed for use in environments where explosive gases can be present (e.g. Gas fields, Oil rigs and Chemical plants etc.) and have been ATEX and IECEx certified as detailed overleaf (SIL2 - IEC61508 proven reliability).

These switches are manufactured from a high quality casting which offers robust construction and protection to IP67 for use within heavily polluted industrial environments. A special feature of the instruments is the separation of the flameproof and adjustment compartments allowing for safe on-site adjustment of the set point with power on and the switch in operation.

Perseus Exd switches must be installed in accordance with BS EN 60079-14

CALIBRATION

The design features a simple form of adjustment against a calibrated scale. This enables a user to order switches set at a predetermined point or stock a mid range setting and adjust switches to suit the particular application. The set point can be safely adjusted with the switch electrically live. Adjustment is made by removing the access cover and rotating the set point adjuster using the supplied tommy bar stowed to the right of the scale plate. The setting is read from the centre of the set point adjuster against the calibrated scale. Rotation to the left will increase the set point and to the right decrease it.

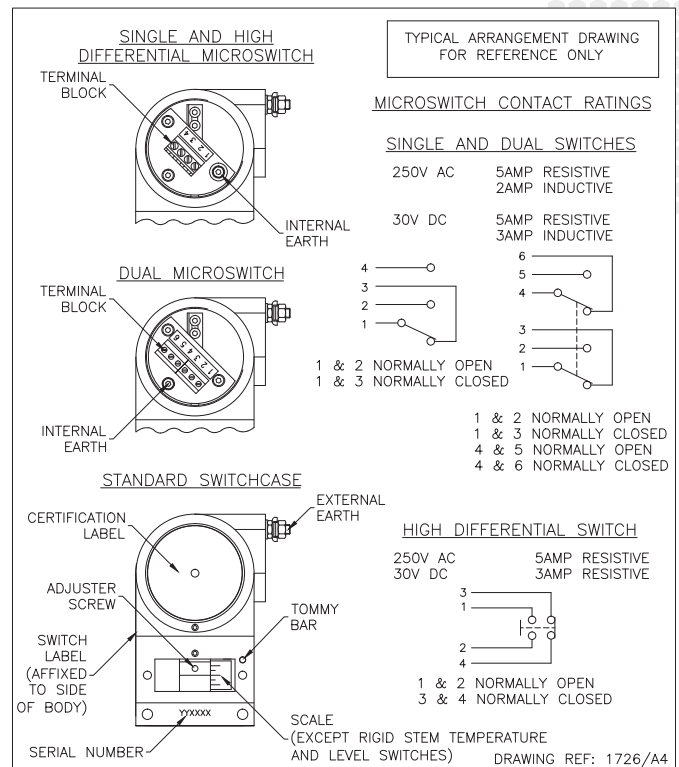

TECHNICAL SPECIFICATION

Switchcase & covers: Black anodised aluminium case and 316 stainless steel adjustment cover.

Microswitch: 1 x SPCO/SPDT or 2 x SPCO/SPDT gold flashed silver contacts. Dual switches are mechanically linked to provide DPDT switching action, reset of switches could be up to 3% apart. Dual microswitches may increase deadband by a factor of two.

Microswitch rating: 5 Amps @ 250 VAC resistive, 2 Amps @ 250VAC inductive
5 Amps @ 30VDC resistive, 3 Amps @ 30 VDC inductive

Electrical Connections: Terminals suitable for cable 0.5 - 2.5 mm².
(Max 1.5 mm² for dual microswitch version)

Electrical Conduit Entry: M20 x 1.5 ISO. ½" NPT via adaptors

Environmental Protection: IP67 in accordance with BS EN 60529 : 1992 & IEC 60529 : 2001.

Vibration and shock parameters: Switches were subjected Lloyds Register Test Specification 1, section 13 BS EN 60068-2-6 : 1996 (Test Fc vibration) and BS EN 60068-2-27 : 1995 (Test Ea shock).

Temperature Limitations: Pressure, Vacuum and Differential Pressure.

Process: Diaphragm actuated (unless otherwise stated) -30 to +90°C (Nitrile) or -20 to +150 Deg.C (Viton). Piston actuated -30 to 120°C (Nitrile), -20 to +150°C (Viton), -50 to +150°C (PTFE) or -30 to +125°C (EPDM).

Ambient: -50 to +85°C (standard). **Storage:** -50 to +85 Deg.C
(For temperature, level and flow switches please refer to specific pages).

Certification: Switches can be supplied for gas environments.

ATEX/IECEx certified Exd Flameproof - Gas (with or without resistors)
CE Ex II2G Exd IIC T* Gb. T6 Tamb -50°C to +74°C, T5 Tamb -50°C to +89°C.

Special conditions for safe use. 1) No modifications must be made to the flamepaths of the unit without consultation of the drawings. 2) When conduit is utilised it must be sealed in accordance with Clause 13.2.2 of EN 60079-1:2007 with a suitably approved (Ex d IIC Gb) conduit sealing devise. 3) Suitably rated cable must be selected based on T Class shown above. 4) Only suitably certified Ex d IIC Gb cable glands to be used.

ATEX/IECEx certified Exia Intrinsically Safe – Gas
CE Ex II1G Exia IIC T6 Ta -50 to +78°C, T5 Ta +93°C, T4 Ta +128°C or
CE Ex II1G Exia IIC T5 Ta -50 to +72°C, T4 Ta +122°C (with resistors).

Special conditions for safe use. 1) Aluminium may only be used when the ignition hazardous assessment shows there is no risk of ignition from incendive impact or abrasion sparks.

AEX certification is available on medium pressure, metal diaphragm and high pressure switches and rigid stem temperature switches.

Accuracy: +/-1% at 20°C.

ABOUT PYROPRESS

Our products are designed to work in demanding and hazardous environments which require fast and cost effective solutions in instrumentation and control.

Pyropress control sensors provide safe and reliable electrical switching of alarm or control circuits in response to changes in temperature, pressure, differential pressure, vacuum, fluid, flow and level conditions.

QUALITY

To support the design of state of the art products the company has invested heavily in the latest CNC technology.

We are able to produce our own components to a high degree of accuracy assuring a reliable and consistent quality product.

T: +44 (0)1752 333933 | sales@pyropress.com
www.pyropress.com

PPSSC1063 | issue 1