

PE157/15

EU DECLARATION OF CONFORMITY

Manufacturer: Pyropress Limited
Address: Bell Close, Plympton, Plymouth, Devon, England, PL7 4JH

The Manufacturer hereby declares that the flameproof product: - Hermes Type:
PF41 & PF42 Pressure Switch

Comply with the requirements of:

Product Intended for Use in Potentially Explosive Atmospheres
EU Directive 2014/34/EU and UKSI 2016:1107 (as amended by UKSI 2019:696) – Schedule 3A, Part 1.
II 2 G Ex db IIC T6...T4 Gb
T6 (Tamb -50°C to +71°C), T5 (Tamb -50°C to +86°C), T4 (Tamb -50°C to +100°C)

International Electrotechnical Commission IEC Certification Scheme for Explosion Atmospheres
Ex db IIC T6...T4 Gb
T6 (Tamb -50°C to +71°C), T5 (Tamb -50°C to +86°C), T4 (Tamb -50°C to +100°C)

When used within the limitations & conditions of the product specifications, working instructions &

EC Type Examination Certificate Number: ExVeritas 19ATEX0502X

IECEX Type Examination Certificate Number: IECEX EXV 19.0032X

UKEX Type Examination Certificate Number: ExVeritas 21UKEX0897X

Harmonised standards applied: EN 60079-0: 2018, EN60079-1: 2014

Other Standards applied: IEC 60079-0: 2017 and IEC 60079-1: 2014-06

Ingress Protection, EN60529:1992; IPX6 & IP67 rated.

Other Directives applied: Pressure Equipment 97/23/EC, Sound Engineering Practice (SEP) Article 3 (3).

Notified Body responsible for EU Type Examination Certificate:

ExVeritas ApS, Severinsmindevej 6, 4420 Regstrup, Denmark. Notified body No 2804

Notified Body responsible for IECEX and UKEX Type Examination Certificates:

Ex Veritas, Units 16-18, Abenbury Way, Wrexham Industrial Estate, Wrexham, LL13 9UZ, UK.

Notified body No 2585.

Notified Body responsible for Quality Assurance:

Intertek Testing Services NA Ltd, 4920-135 Avenue, Edmonton, AB, T5V 1R9, Canada. Notified body No 2903.

Intertek Testing & Certification Ltd, Intertek House, Cleeve Road, Leatherhead, Surrey, England KT22 7SB.

Notified body No: 0359.

Equipment Specification: Product specifications are listed in the Technical file TCF 1050

This Declaration may only be used in its entirety & without change. Modification of this equipment / product without prior approval from Pyropress Limited will render this declaration null & void.

Steve Noakes, Managing Director of Pioneer Safety Group

Signed.....*S. Noakes*.....Dated.... 1st August 2026.

1 **EU - Type Examination Certificate**

2 Equipment intended for use in Potentially Explosive Atmospheres Directive 2014/34/EU

3 Certificate Number: ExVeritas 19ATEX0502X Issue: 1

4 Equipment: Hermes Ex db Switch

5 Manufacturer: Pyropress Ltd

6 Address: Bell Close,
Plympton,
Plymouth,
Devon PL7 4JH UK

7 This equipment and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.

8 ExVeritas, Notified Body number 2804 in accordance with Article 17 of the Council Directive 2014/34/EU of 26 February 2014, certifies that this equipment or protective system has been found to comply with the Essential Health and Safety Requirements relating to design and construction of equipment and protective systems for use in potentially explosive atmospheres given in Annex II to the Directive

9 Compliance with the applicable Essential Health and Safety Requirements has been assured by compliance with the following Standards and section 16 of this certificate:

EN 60079-0: 2018 EN 60079-1: 2014

10 If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.

11 This EU-Type Examination Certificate relates only to the design, construction, examination and tests of the specified equipment or protective system in accordance to the Directive 2014/34/EU. Further requirements of the Directive apply to the manufacturing process and supply of this equipment or protective system. These are not covered by this certificate.

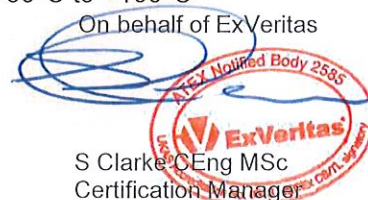
12 The marking of the equipment shall include the following:

 II 2 G Ex db IIC T6...T4 Gb T6 Tamb -50°C to +71°C
T5 Tamb -50°C to +86°C
T4 Tamb -50°C to +100°C

The logo for DANAK, featuring a red crown icon above the word 'DANAK' in a bold, red, sans-serif font. Below it, the text 'PROD Reg.No. 7044' and 'Member of EA MLA' is written in a smaller, black, sans-serif font.

DANAK
PROD Reg.No. 7044
Member of EA MLA

On behalf of ExVeritas

A blue ink signature is written over a red circular stamp. The stamp contains the text 'ATEX Notified Body 2585' and the ExVeritas logo. Below the signature, the text 'S Clarke CEng MSc' and 'Certification Manager' is printed in a black, sans-serif font.

S Clarke CEng MSc
Certification Manager

This certificate may only be reproduced in its entirety and without any change, schedule included.
The certificate is only valid when it carries an original signature.
For help or assistance relating to this certificate, contact info@exveritas.com.
ExVeritas ApS, Severinsmindevej 6, 4420 Regstrup, Denmark.
ExVeritas® is a registered trademark, unauthorised use will lead to prosecution.

Schedule

13 Description of Equipment or Protective System

The Hermes switch is intended to sense changes in pressure via the use of various mechanical actuators. One or two microswitches are contained within a flameproof chamber that possesses an internal free volume of less than 10cc. This chamber comprises a tubular housing that acts at one end as a gland body for an integral cable gland and which is closed off at the other by a threaded end cap. The cable gland utilises an elastomeric sealing ring and the compression element's interface with the housing forms a flame-path of the threaded type. The housing-end cap interface also forms a threaded flame-path. And the flame-path(s) formed by the end cap-operating rod interface(s) - one or two depending on the number of microswitches fitted - is/are of the cylindrical type. An outer tube constructed of stainless steel or material of greater tensile strength serves to shield the end cap from damage and uphold the type of protection.

Ratings: 250Vac 5A or 30Vdc 3A

13.1 Detail of changes

Issue 1

- Transfer of certificate to Danish NB – no drawing changes

14 Descriptive Documents

14.1 Associated Report and Certificate History:

Report Number	Cert Issue Date	Issue	Comment
R2100/A/1	22 Aug 2019	0	Initial issue of the Prime Certificate
N/A – ExV3035	31 Oct 2020	1	Transfer of the certificate from ExVeritas UK, Notified Body number 2585 to ExVeritas Denmark, Notified Body number 2804. Certificate number remains unchanged.

14.2 Compliance Drawings:

Issue 0

Title:	Drawing No.:	Rev. Level:	Sheets	Date:
Certification Drawing Hermes Ex db Switch	1995/A1	1	1 of 1	28/03/19
Certification Drawing Label, Hermes Ex db Switch	1996/A3	1	1 of 1	28/03/19

15 Conditions of Certification

15.1 Special Conditions for Safe Use

- Flameproof joints not intended for repair.
- External earthing is facilitated by the electrical continuity between the enclosure and the process connection. End - users must take this into consideration during installation.
- Microswitches must only be accessed by Pyropress-approved personnel and only when no explosive atmosphere is present.

15.2 Conditions for Use – Manufacturer's responsibility

- Pyropress must supply the Hermes pre-wired with suitably rated cable.

16 Essential Health and Safety Requirements

Essential Health and Safety Requirements are addressed by the standards listed in section 9 and where required the report listed in section 14.1

Certificate: ExVeritas 19ATEX0502X Issue 1

This certificate may only be reproduced in its entirety and without any change, schedule included.

For help or assistance relating to this certificate, contact info@exveritas.com.

ExVeritas ApS, Severinsmindevej 6, 4420 Regstrup, Denmark.

ExVeritas® is a registered trademark, unauthorised use will lead to prosecution.



Schedule

The manufacturer shall inform the Notified Body of any modifications to the design of the product described by this schedule.

Certificate: ExVeritas 19ATEX0502X Issue 1

This certificate may only be reproduced in its entirety and without any change, schedule included.

For help or assistance relating to this certificate, contact info@exveritas.com.

ExVeritas ApS, Severinsmindevej 6, 4420 Regstrup, Denmark.

ExVeritas® is a registered trademark, unauthorised use will lead to prosecution.



IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: IECEx EXV 19.0032X

Issue No: 0

Certificate history:

Issue No. 0 (2019-08-23)

Status: **Current**

Page 1 of 3

Date of Issue: **2019-08-23**

Applicant: **Pyropress Ltd**
Bell Close,
Plympton,
Plymouth,
Devon
PL7 4JH
United Kingdom

Equipment: **Hermes Ex db Switch**

Optional accessory:

Type of Protection: **Flameproof Ex 'db'**

Marking: **Ex db IIC T6...T4 Gb**

T6 Tamb -50°C to +71°C

T5 Tamb -50°C to +86°C

T4 Tamb -50°C to +100°C

Approved for issue on behalf of the IECEx
Certification Body:

S Clarke CEng MSc MIET

Position:

Certification Manager

Signature:
(for printed version)

Date:



1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

ExVeritas Limited
Units 16-18 Abenbury Way
Wrexham Ind. Est.
Wrexham LL 139UZ
United Kingdom





IECEX Certificate of Conformity

Certificate No: IECEx EXV 19.0032X

Issue No: 0

Date of Issue: 2019-08-23

Page 2 of 3

Manufacturer: **Pyropress Ltd**
Bell Close,
Plympton,
Plymouth,
Devon
PL7 4JH
United Kingdom

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

IEC 60079-0 : 2017 Explosive atmospheres - Part 0: Equipment - General requirements
Edition:7.0

IEC 60079-1 : 2014-06 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"
Edition:7.0

*This Certificate **does not** indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.*

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:

[GB/EXV/ExTR19.0036/00](#)

Quality Assessment Report:

[GB/ITS/QAR11.0004/05](#)



IECEx Certificate of Conformity

Certificate No: IECEx EXV 19.0032X

Issue No: 0

Date of Issue: 2019-08-23

Page 3 of 3

Schedule

EQUIPMENT:

Equipment and systems covered by this certificate are as follows:

The Hermes switch is intended to sense changes in pressure via the use of various mechanical actuators. One or two microswitches are contained within a flameproof chamber that possesses an internal free volume of less than 10cc. This chamber comprises a tubular housing that acts at one end as a gland body for an integral cable gland and which is closed off at the other by a threaded end cap. The cable gland utilises an elastomeric sealing ring and the compression element's interface with the housing forms a flame-path of the threaded type. The housing-end cap interface also forms a threaded flame-path. And the flame-path(s) formed by the end cap-operating rod interface(s) - one or two depending on the number of microswitches fitted - is/are of the cylindrical type. An outer tube constructed of stainless steel or material of greater tensile strength serves to shield the end cap from damage and uphold the type of protection.

Ratings: 250Vac 5A or 30Vdc 3A

SPECIFIC CONDITIONS OF USE: YES as shown below:

Special Conditions of Use

- Flameproof joints not intended for repair.
- External earthing is facilitated by the electrical continuity between the enclosure and the process connection. End - users must take this into consideration during installation.
- Microswitches must only be accessed by Pyropress-approved personnel and only when no explosive atmosphere is present.

Manufacturer's Responsibility

- Pyropress must supply the Hermes pre-wired with suitably rated cable.

Annex:

[IECEx ExV19.0032X Annex.pdf](#)

Manufacturer's documents:				
Title:	Drawing No.:	Rev	Sheets	Date:
Certification Drawing Hermes Ex db Switch	1995/A1	1	1 of 1	28/03/19
Certification Drawing Label, Hermes Ex db Switch	1996/A3	1	1 of 1	28/03/19

*Note: An * is included before the title of documents that are new or revised.*

1 UNITED KINGDOM CONFORMITY ASSESSMENT

UK TYPE EXAMINATION CERTIFICATE

2 Product Intended for use in Potentially Explosive Atmospheres

UKSI 2016:1107 (as amended by UKSI 2019:696) – Schedule 3A, Part 1

3 Type Examination Certificate Number: ExV 21UKEX0897X

Issue: 0

4 Product: Hermes Ex db Switch

5 Manufacturer: Pyropress Ltd

6 Address: Bell Close
Plympton
Plymouth
Devon, PL7 4JH, UK.

7 This product and any acceptable variation thereto is specified in the schedule to this certificate and the documents therein referred to.

8 ExVeritas Limited Approved Body number 2585, in accordance with Regulation 42 of the Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2016, UKSI 2016:1107 (as amended by UKSI 2019:696), certifies that this product has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of products intended for use in potentially explosive atmospheres given in Schedule 1 of the Regulations.

9 Compliance with the applicable Essential Health and Safety Requirements has been assured by compliance with:

EN IEC 60079-0: 2018

EN 60079-1: 2014

Except in respect of those requirements listed at section 16 of the schedule to this certificate.

10 If the sign “X” is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.

11 This TYPE EXAMINATION CERTIFICATE relates only to the design and construction of the specified product. Further requirements of the Regulations apply to the manufacturing process and supply of this product. These are not covered by this certificate.

12 The marking of the equipment shall include the following:

 II 2G Ex db IIC T6...T4 Gb

T6 Tamb -50°C to +71°C

T5 Tamb -50°C to +86°C

T4 Tamb -50°C to +100°C



No. 8613

On behalf of ExVeritas


S Clarke CEng MSc FIET
Managing Director

This certificate may only be reproduced in its entirety and without any change, schedule included.

The status of this certificate can be verified at www.exveritas.com

For help or assistance relating to this certificate, contact info@exveritas.com.

ExVeritas, Units 16-18, Abenbury Way, Wrexham Industrial Estate, Wrexham, United Kingdom LL13 9UZ.

ExVeritas® is a registered trademark, unauthorised use will lead to prosecution.

13 Description of Product

The Hermes switch is intended to sense changes in pressure via the use of various mechanical actuators. One or two microswitches are contained within a flameproof chamber that possesses an internal free volume of less than 10cc. This chamber comprises a tubular housing that acts at one end as a gland body for an integral cable gland and which is closed off at the other by a threaded end cap. The cable gland utilises an elastomeric sealing ring and the compression element's interface with the housing forms a flame-path of the threaded type. The housing-end cap interface also forms a threaded flame-path. And the flame-path(s) formed by the end cap-operating rod interface(s) - one or two depending on the number of microswitches fitted - is/are of the cylindrical type. An outer tube constructed of stainless steel or material of greater tensile strength serves to shield the end cap from damage and uphold the type of protection.

Ratings: 250Vac 5A or 30Vdc 3A

14 Descriptive Documents

14.1 Associated Report and Certificate History:

Report Number	Cert Issue Date	Issue	Comment
R3357/A/1	22 Jul 2021	0	Initial issue of the Prime Certificate

14.2 Compliance Drawings:

Issue 0

Title:	Drawing No:	Sheets	Rev. Level:	Date:
Certification Drawing Hermes Ex db Switch	1995/A1	1 of 1	1	23/05/19
UKEX Certification Drawing Hermes Ex db Switch	2047/A3	1 of 1	1	13.07.21

15 Specific Conditions of Use

15.1 Special Conditions for Safe Use

- Flameproof joints not intended for repair.
- External earthing is facilitated by the electrical continuity between the enclosure and the process connection. End - users must take this into consideration during installation.
- Microswitches must only be accessed by Pyropress-approved personnel and only when no explosive atmosphere is present.

15.2 Routine tests

- None

16 Essential Health and Safety Requirements (Regulations Schedule 1)

Essential Health and Safety Requirements are addressed by the standards listed in section 9 and where required the report listed in section 14.1

The manufacturer shall inform ExVeritas of any modifications to the design of the product described by this schedule.

Certificate: ExVeritas 21UKEX0897X

Issue 0

This certificate may only be reproduced in its entirety and without any change, schedule included.

For help or assistance relating to this certificate, contact info@exveritas.com.

ExVeritas, Units 16-18, Abenbury Way, Wrexham Industrial Estate, Wrexham, United Kingdom LL13 9UZ.

ExVeritas® is a registered trademark, unauthorised use will lead to prosecution.